

Data sheet

FxiS / FxeS



Technical Data

Type		F0eS	F1eS	F1eS	F2eS	F2eS
Accuracy class standard	%	0,05				
Rated torque Mn	Nm	50 100 200 500 1000	200 500 1000 1500	2000 2500 3000	2500 5000 7000	10000 15000 20000

Torque measuring system						
Technology	-	Rotating				
Rated torque Mn # 2	Nm	50 100 200 500 1000	200 500 1000 1500	2000 2500 3000	2500 5000 7000	10000 15000 20000
Rated torque second channel (Minimum), optional # 3	Nm	20 20 40 100 200	40 100 200 300	400 500 600	500 1000 2000	2000 3000 4000
Accuracy class optional	%	0,03				
Outer diameter of rotor # 1	mm	94	150	150	230	230
Lengths (Rotor, without centering)	mm	74	80	80	107	107
Pitch circle diameter # 8	mm	75	130	130	196	196
Outputs	-	Frequency, Voltage, Current, CAN bus, Alert				

Speed measuring system						
Speed detection (integrated)	-	without	inductive	inductive	inductive	inductive
Speed detection (optional)	-	inductive / optical	magn.	magn.	magn.	magn.
Maximum Speed without optional speed measuring system	rpm	20000	20000	20000	15000	15000
Optional increased speed	rpm	25000	25000	25000	17000	17000
Maximum speed with magnetic speed encoder	rpm	N/A	9000	9000	6500	6500
Maximum speed with optical speed encoder	rpm	20000	N/A	N/A	N/A	N/A
Maximum speed with inductive speed encoder	rpm	20000	20000	20000	12500	12500

Torque Accuracy (related to rated torque)						
Frequency output / CAN	%	≤±0,05				
Voltage output	%	≤±0,1				
Current output	%	≤±0,1				
Frequency output, option higher accuracy	%	≤±0,03				

Technical Data

Type		F0eS	F1eS	F1eS	F2eS	F2eS
Accuracy class standard	%			0,05		
Rated torque Mn	Nm	50 100 200 500 1000	200 500 1000 1500	2000 2500 3000	2500 5000 7000	10000 15000 20000

Linearity deviation including hysteresis related to nominal value						
Frequency / CAN, 0% ... 30% of Mn	%			≤±0,01		
Frequency / CAN, 30% ... 60% of Mn	%			≤±0,02		
Frequency / CAN, 60% ... 100% of Mn	%			≤±0,03		
Voltage output	%			≤±0,05		
Current output	%			≤±0,05		
Rel. standard deviation of the reproducibility according to DIN 1319, by reference to variation of the output signal						
Frequency output / CAN	%			≤±0,03		
Voltage output	%			≤±0,05		
Current output	%			≤±0,05		
Test signal	-			see test report		
Temperature Influence per 10K in the nominal temperature range on the output signal related to the actual value of signal span						
Frequency output / CAN	%			≤±0,05		
Voltage output	%			≤±0,1		
Current output	%			≤±0,1		
Temperature influence per 10K in the nominal temperature range on the zero signal, related to the nominal sensitivity						
Frequency output / CAN	%			≤±0,05		
Voltage output	%			≤±0,1		
Current output	%			≤±0,1		
Long-term drift over 48h at reference temperature						
Voltage output	mV			<1		
Current output	μA			<0,8		
Temperature range						
Nominal temperature range rotor/stator	°C			0...+80 / 0...+70		
Operating temperature range rotor/stator	°C			-20...+85 / -20...+70		
Storage temperature range rotor/stator	°C			-30...+85		

Technical Data

Type		F0eS	F1eS	F1eS	F2eS	F2eS
Accuracy class standard	%			0,05		
Rated torque Mn	Nm	50 100 200 500 1000	200 500 1000 1500	2000 2500 3000	2500 5000 7000	10000 15000 20000

Nominal sensitivity (range between zero torque and rated torque)

Frequency output	kHz	20
Voltage output	V	5 / 10 / 2,5 / 5
Current output	mA	8 / 10

Output signal at zero torque

Frequency output	kHz	60
Voltage output	V	0 / 0 / 2,5 / 5
Current output	mA	12 / 10

Nominal output signal

Frequency output at positive nominal value	kHz	80
Frequency output at negative nominal value	kHz	40
Voltage output at positive nominal value	V	5 / 10 / 5 / 10
Voltage output at negative nominal value	V	-5 / -10 / 0 / 0
Current output at positive nominal value	mA	20
Current output at negative nominal value	mA	4 / 0

Max. modulation range

Frequency output	kHz	30...90
Voltage output	V	-10,5...+10,5
Current output	mA	0...24

Group delay time

Frequency output	μs	10
Voltage output	μs	3000
CAN	μs	1000

Technical Data

Type		F0eS	F1eS	F1eS	F2eS	F2eS
Accuracy class standard	%	0,05				
Rated torque Mn	Nm	50 100 200 500 1000	200 500 1000 1500	2000 2500 3000	2500 5000 7000	10000 15000 20000

Speed measuring system	Inductive (integrated track at rotor)					
Pulse per rev	ppr.	30	60	60	120	120
Max. output frequency	kHz	25				
Minimum speed for sufficient pulse stability	rpm	>0				

Speed measuring system	Magneto resistive (2 tracks approx. 90 degree phase shifted)					
Pulses per rev	ppr.	N/A	1000	1000	1448	1448
Max. output frequency	kHz	N/A	250	250	250	250
Minimum speed for sufficient pulse stability	rpm	N/A	>0	>0	>0	>0
Nominal clearance (sensor - pole ring)	mm	N/A	0,7	0,7	0,7	0,7
Working airgap (sensor - pole ring)	mm	N/A	0,1...1,0	0,1...1,0	0,1...1,0	0,1...1,0
Nominal axial displacement (rotor - stator) # 4	mm	N/A	2	2	4	4
Tolerance to nominal axial displacement (rotor - stator)	mm	N/A	±0,5	±0,5	±0,5	±0,5

Speed measuring system	Optical					
Pulses per rev	ppr.	360 / 400 / 240	N/A	N/A	N/A	N/A
Max. output frequency	kHz	250 (RS422)	N/A	N/A	N/A	N/A
Minimum speed for sufficient pulse stability	rpm	>0	N/A	N/A	N/A	N/A
Nominal clearance (stator - pole disk)	mm	1,5	N/A	N/A	N/A	N/A
Working airgap (stator - pole disk)	mm	1,4...1,6	N/A	N/A	N/A	N/A
Axial nominal displacement (rotor - stator) # 4	mm	4	N/A	N/A	N/A	N/A
Tolerance to nominal displacement (rotor - stator)	mm	+0,5/-0,3	N/A	N/A	N/A	N/A

Technical Data

Type		F0eS	F1eS	F1eS	F2eS	F2eS
Accuracy class standard	%	0,05				
Rated torque Mn	Nm	50 100 200 500 1000	200 500 1000 1500	2000 2500 3000	2500 5000 7000	10000 15000 20000

Load limits # 7						
Limit torque, related to Mn	%	500				
Breaking torque approx., related to Mn	%	1000				
Axial limit force	kN	9				
		13	11			
		19	15	40	112	213
		40	28	45	159	296
		81	34	50	213	332
Lateral limit force	N	245				
		480	770			
		950	1230	6280	6701	20543
		2680	3520	7620	11876	41963
		6790	4920	8790	20543	55227
Bending limit torque	Nm	14				
		27	41			
		53	66	336	457	1402
		150	188	408	810	2863
		379	263	470	1402	3769

Technical Data

Type		F0eS	F1eS	F1eS	F2eS	F2eS
Accuracy class standard	%	0,05				
Rated torque Mn	Nm	50 100 200 500 1000	200 500 1000 1500	2000 2500 3000	2500 5000 7000	10000 15000 20000

Mechanical values						
Torsional stiffness	kNm/rad	17 40 92 275 630	93 160 490 675	880 1065 1230	897 1701 3244	3244 8769 12630
Angle of twist at Mn	°	0,17 0,14 0,12 0,1 0,09	0,12 0,18 0,12 0,13	0,13 0,13 0,14	0,16 0,17 0,12	0,18 0,1 0,09
Axial stiffness	kN/mm	N/A				
Radial stiffness	kN/mm	N/A				
Bending stiffness	kN/°	N/A				
Deflection at axial limit force	mm	N/A				
Additional radial deviation at lateral limit force	mm	N/A				
Parallel deviation at bending limit torque	mm	N/A				
Inherent frequency	Hz	600 900 1300 2300 3300	590 770 1350 1600	1810 2000 2160	600 850 1200	1200 1800 2100
Balance quality-level to DIN ISO 1949	-	G2.5				
Inertia of rotor	kgm²	0,0013 0,0013 0,0014 0,0014 0,0015	0,0112 0,0113 0,0113 0,0113	0,0114 0,0114 0,0115	0,0788 0,0792 0,0799	0,0799 0,0827 0,0848


Technical Data

Type		F0eS	F1eS	F1eS	F2eS	F2eS
Accuracy class standard	%	0,05				
Rated torque Mn	Nm	50 100 200 500 1000	200 500 1000 1500	2000 2500 3000	2500 5000 7000	10000 15000 20000
Weight approx.						
Rotor # 6	kg	1,23 1,28 1,35 1,5 1,7	4,1 4,1 4,1 4,2	4,3 4,3 4,4	13,5 13,6 14,1	14,1 15,2 16
Stator (without speed encoder) # 6	kg	1,1	2,2	2,2	3,2	3,2
Mounting distances (without optional speed detection)						
Nominal radial displacement (rotor - stator)	mm	2,1	2,5	2,5	2,5	2,5
Tolerance to nominal radial displacement (rotor - stator)	mm	<±2,1	<±2,5	<±2,5	<±2,5	<±2,5
Nominal axial displacement rotor - stator # 4	mm	4	2	2	4	4
Tolerance to nominal axial displacement rotor - stator	mm	+0,5/-0,3	±0,5	±0,5	±0,5	±0,5
Flatness and concentricity tolerances rotor						
Circular run-out-axial tolerance # 5	mm	0,01				
Circular run-out-radial tolerance # 5	mm	0,01				
Power supply						
Nominal supply	V (DC)	24				
Max. current consumption in measuring mode	A	<0,7				
Max. current consumption in start-up mode	A	<2				
Nominal power consumption	W	<17				
Load resistance						
Frequency output	-	RS422				
Voltage output	kOhm	≥5				
Dynamic						
Frequency output	kHz	≤7				
Voltage output Fx	kHz	1				
Current output Fx	kHz	1				
CAN Output conversation rate	1/s	≤1000				


Remarks and information

Link no.	Topic	Remark
#1	Detail in the drawings	Value can vary by optional components. Please find details to this attribute in the integrated drawings.
#2	Nominal torque	Based on customer requests, the measurement systems can optionally be optimized for not listed nominal torque values (intermediate ranges possible).
#3	Second torque range	<p>The written second torque range is the smallest possible complying with the given accuracy class. Greater second torque ranges can be chosen on demand.</p> <p>It must be noticed that the mechanical data and load limits will vary for systems with a second measurement range.</p>
#4	Reference planes	Please check the drawings for information about the reference planes of this attribute.
#5	Flatness and concentricity tolerances	The parameters of "Flatness and concentricity tolerances rotor" are manufacturing tolerances.
#6	Weights	Weights are related to components without speed detection system.
#7	Load limits	The given values are only valid if no other load occurs at the same time. If the loads in sum are 100%, the max. error will be 0.3% of the nominal torque.
#8	Pitch circle diameter	The pitch circle diameter is identically at input and output side for most systems. More information is given in the drawings of a product.

Drawing

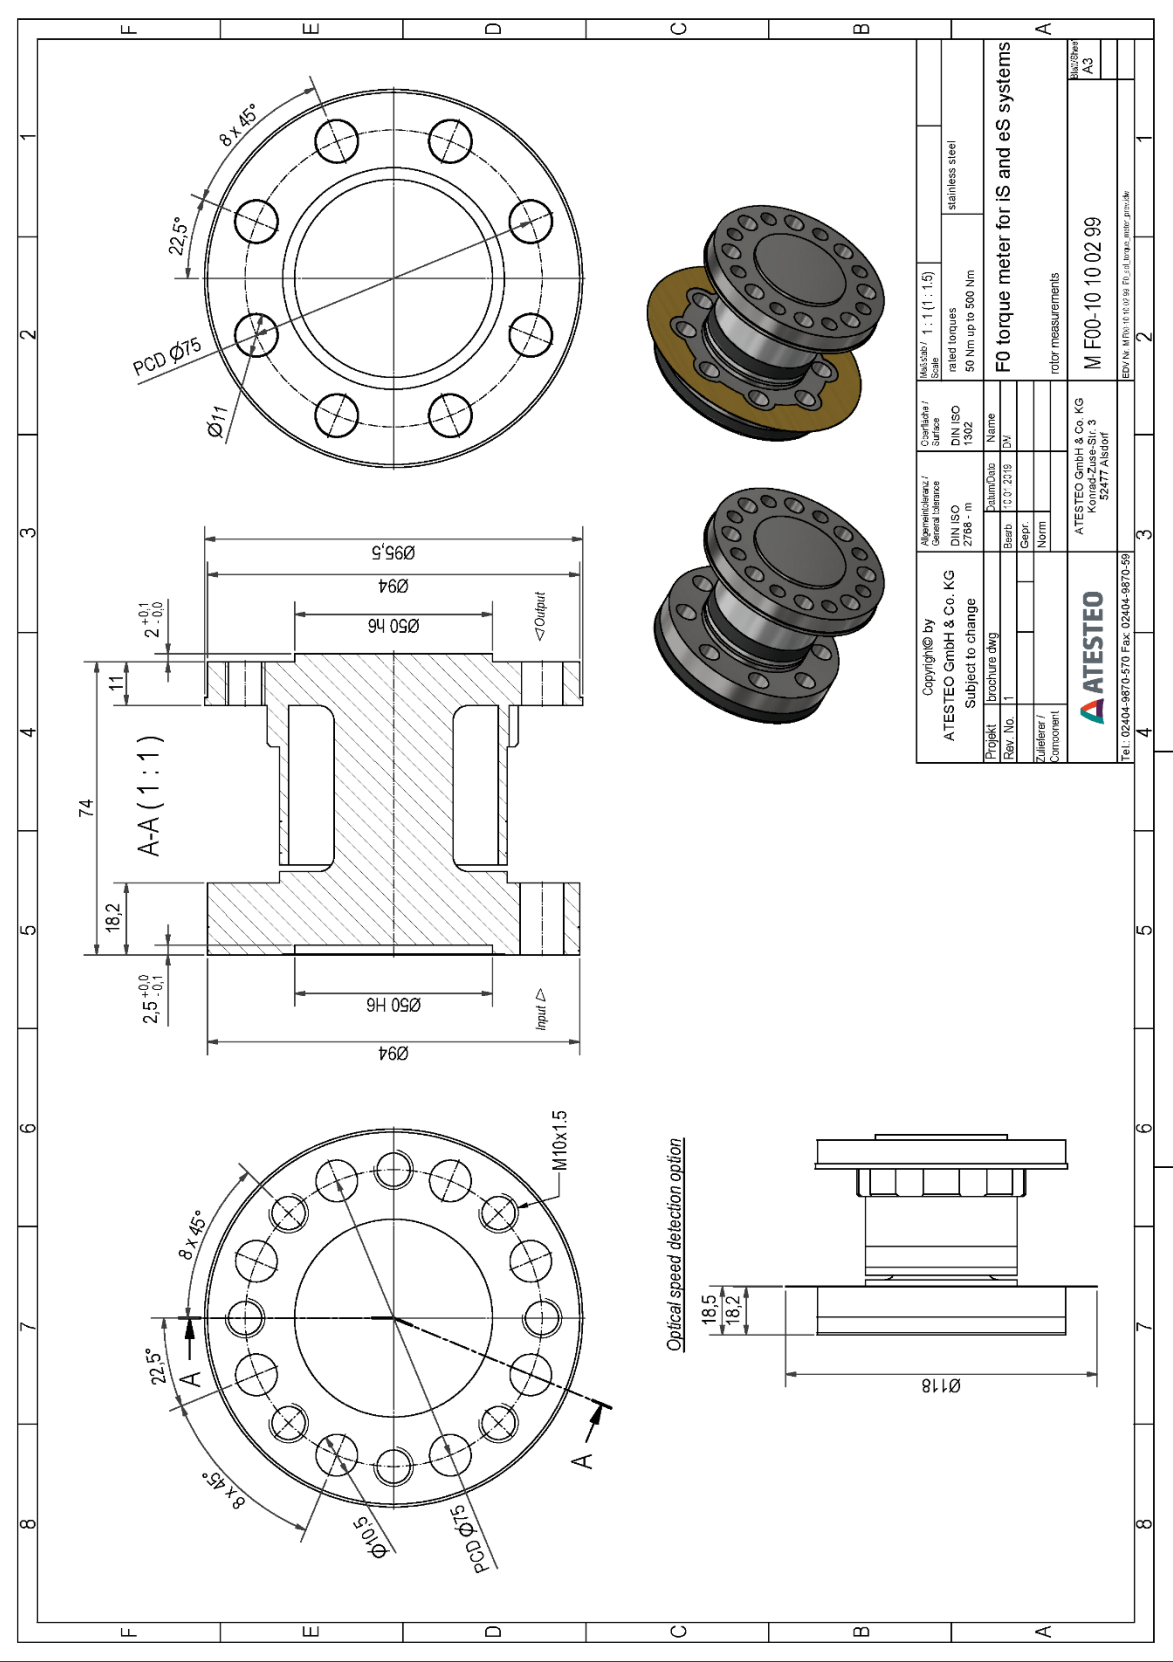


Drawing

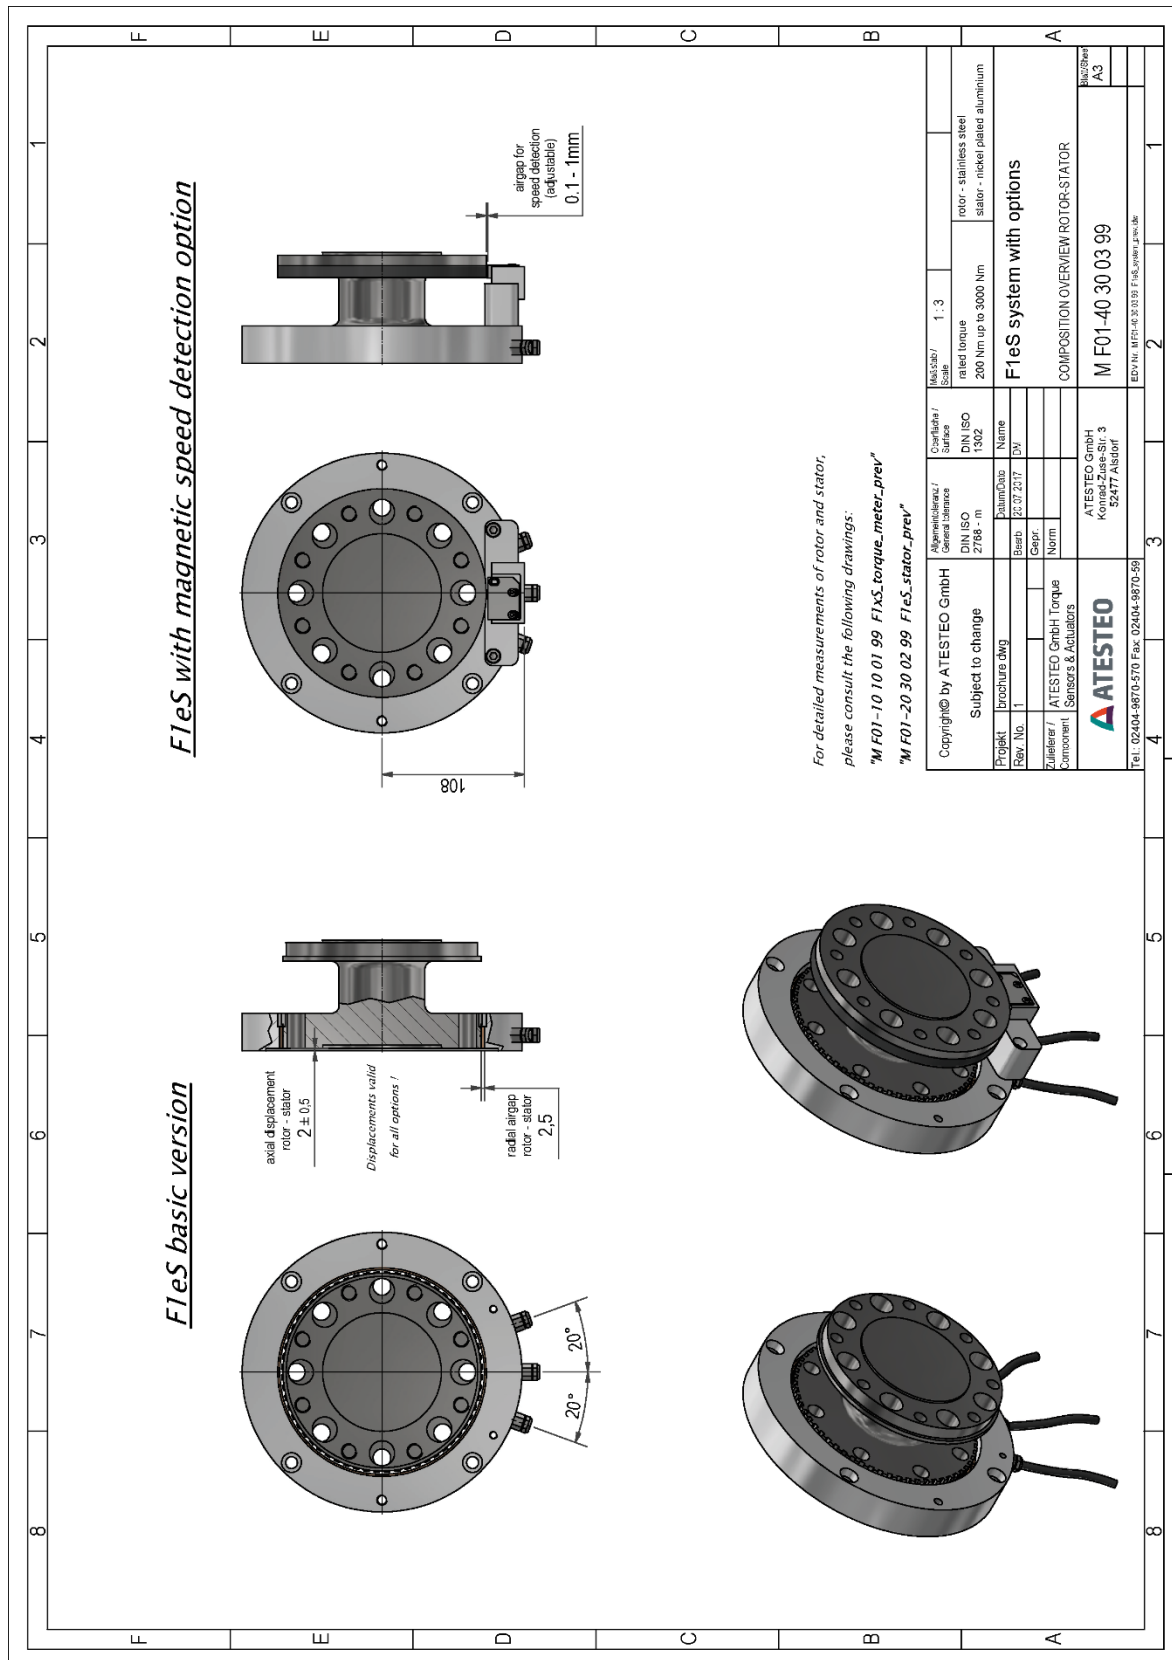


©2020, ATESTEO GmbH & Co. KG, This product data sheet was created on 12.16.2020

The information contained in the product data sheet corresponds to the status quo at the time the document was created. ATESTEO continually further develops its products and reserves the right to make changes to the technical data. ATESTEO does not accept any liability for consequential losses arising from the use of this product data sheet or the information contained therein.

Drawing

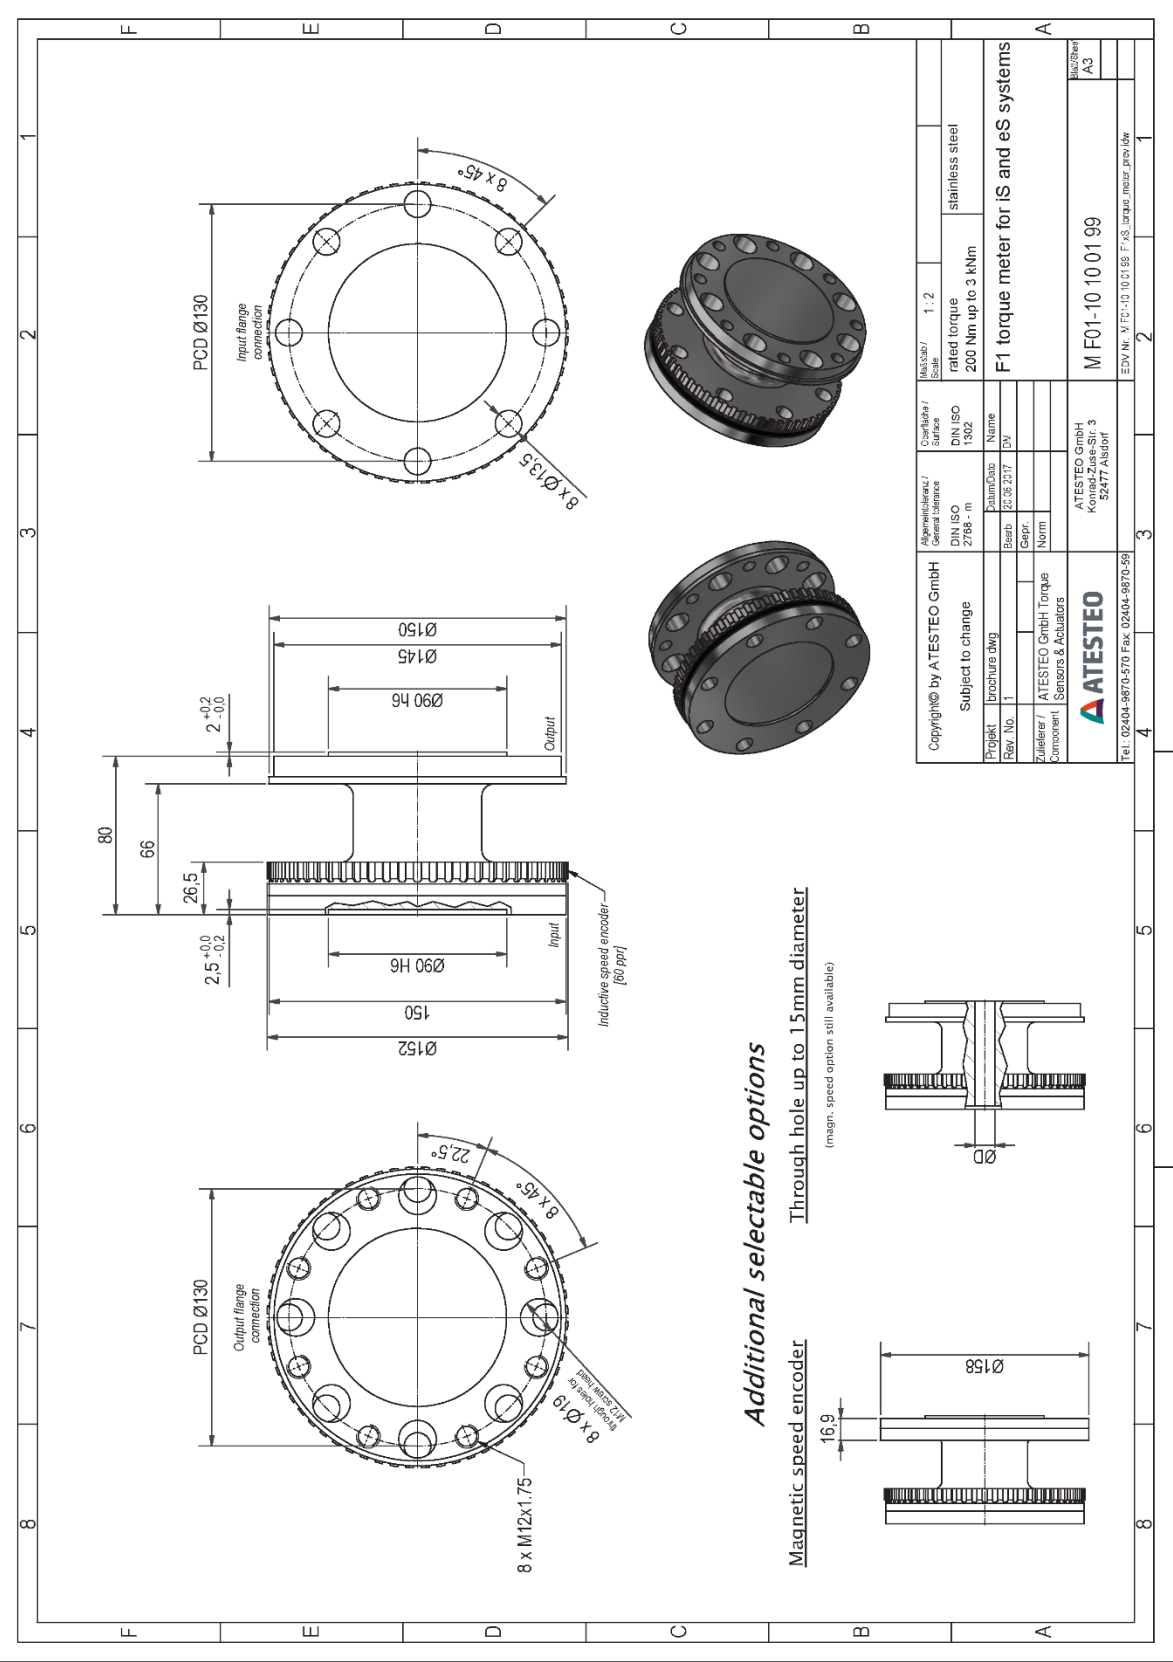


Drawing

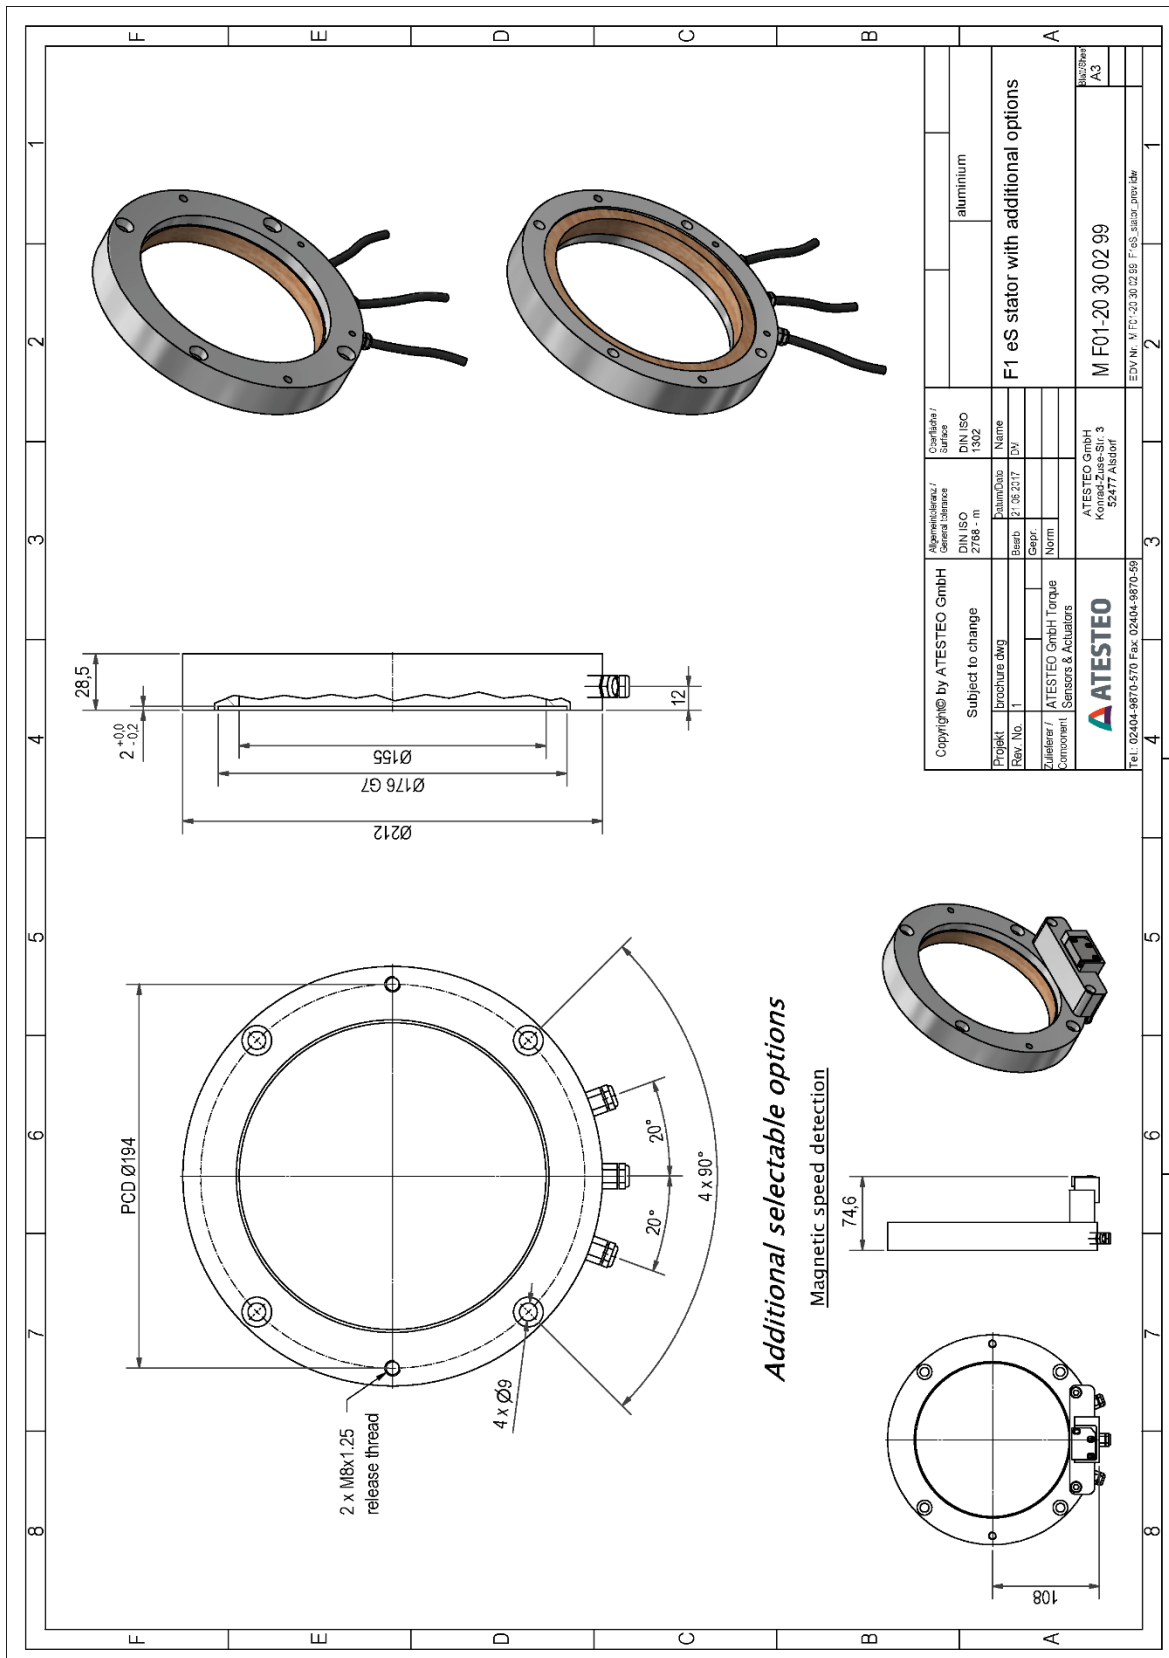

©2020, ATESTEO GmbH & Co. KG, This product data sheet was created on 12.16.2020

The information contained in the product data sheet corresponds to the status quo at the time the document was created. ATESTEO continually further develops its products and reserves the right to make changes to the technical data. ATESTEO does not accept any liability for consequential losses arising from the use of this product data sheet or the information contained therein.


Drawing

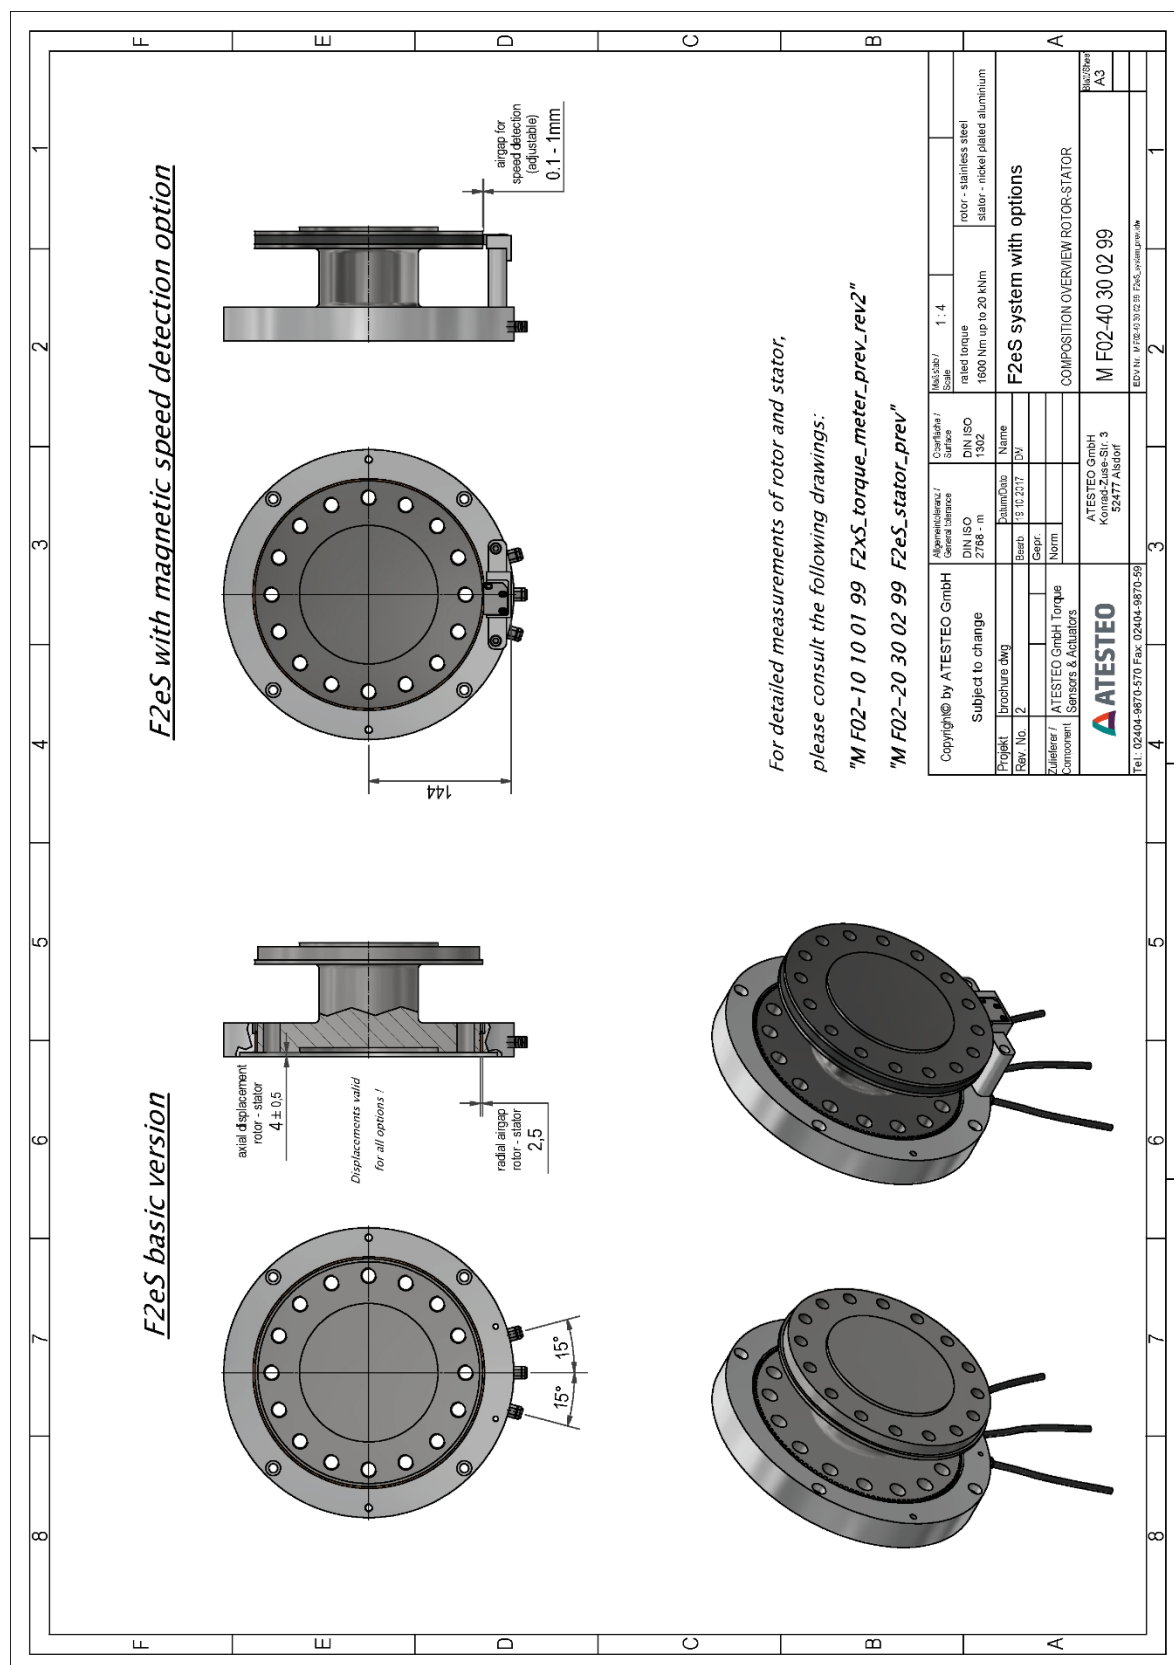


©2020, ATESTEO GmbH & Co. KG, This product data sheet was created on 12.16.2020

The information contained in the product data sheet corresponds to the status quo at the time the document was created. ATESTEO continually further develops its products and reserves the right to make changes to the technical data. ATESTEO does not accept any liability for consequential losses arising from the use of this product data sheet or the information contained therein.

Drawing

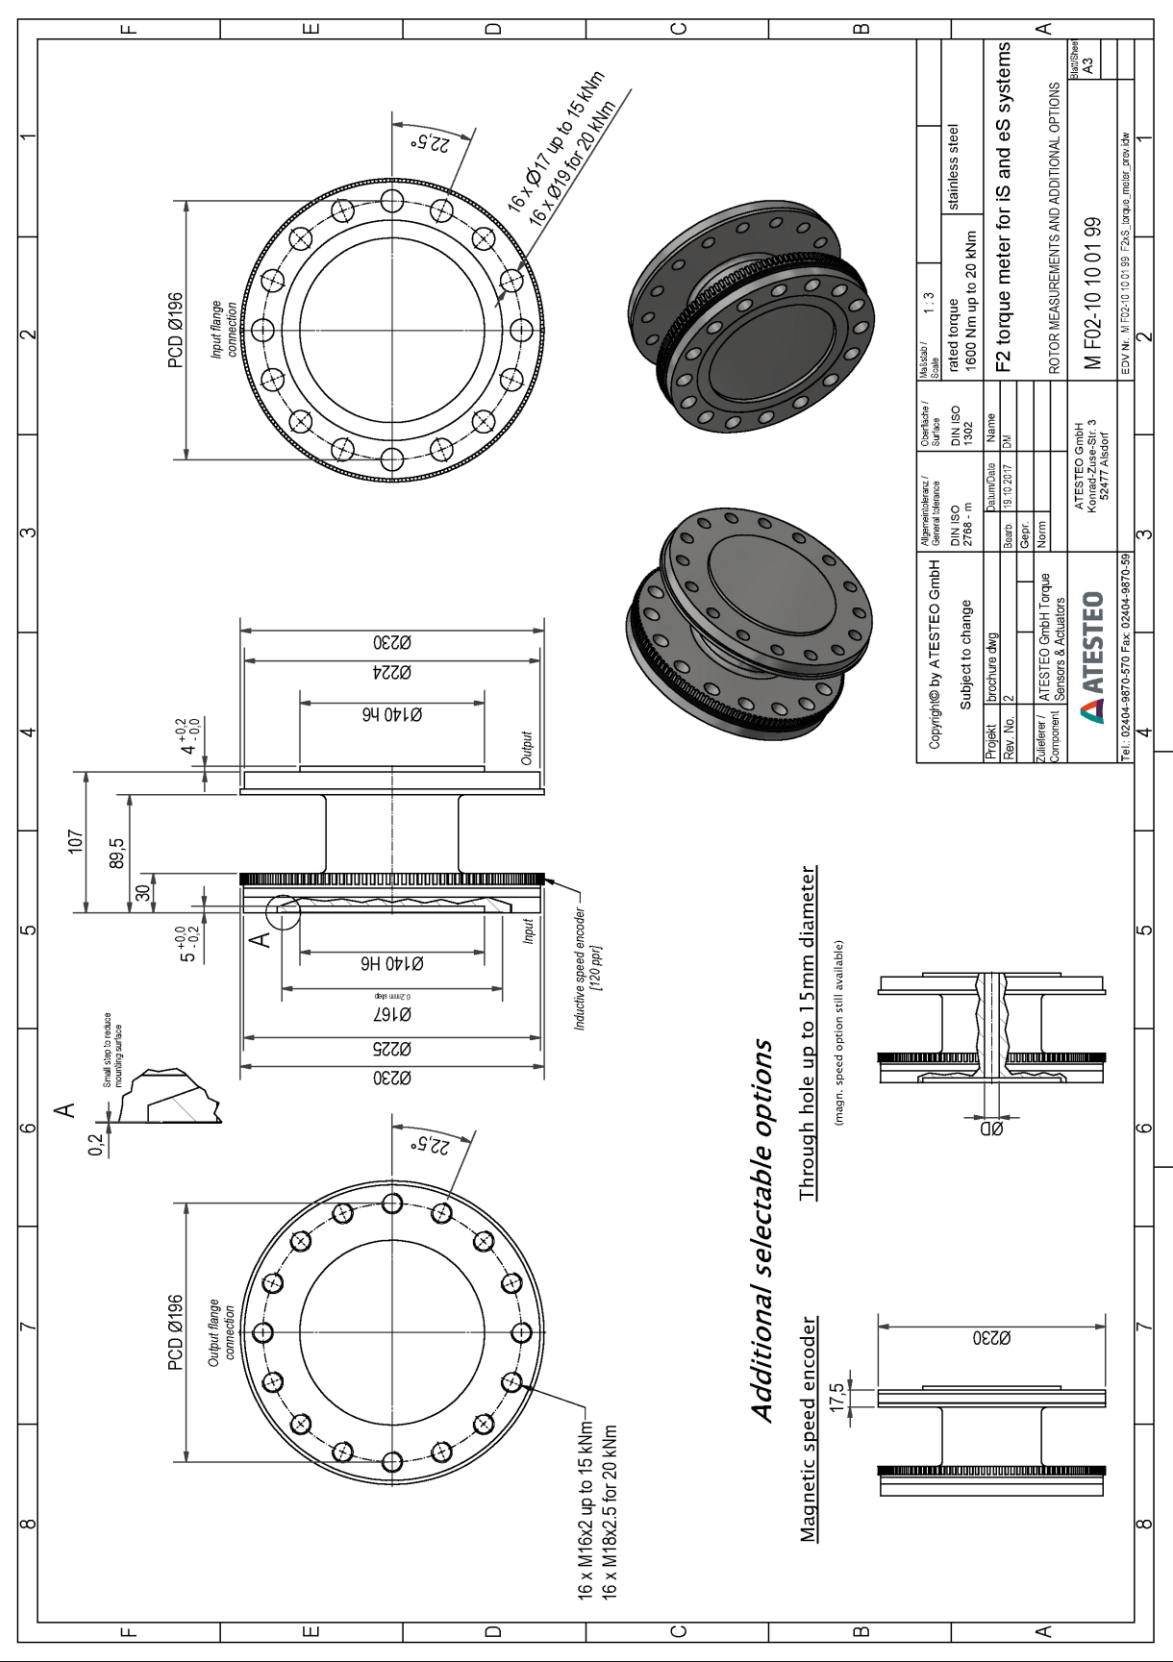


Drawing

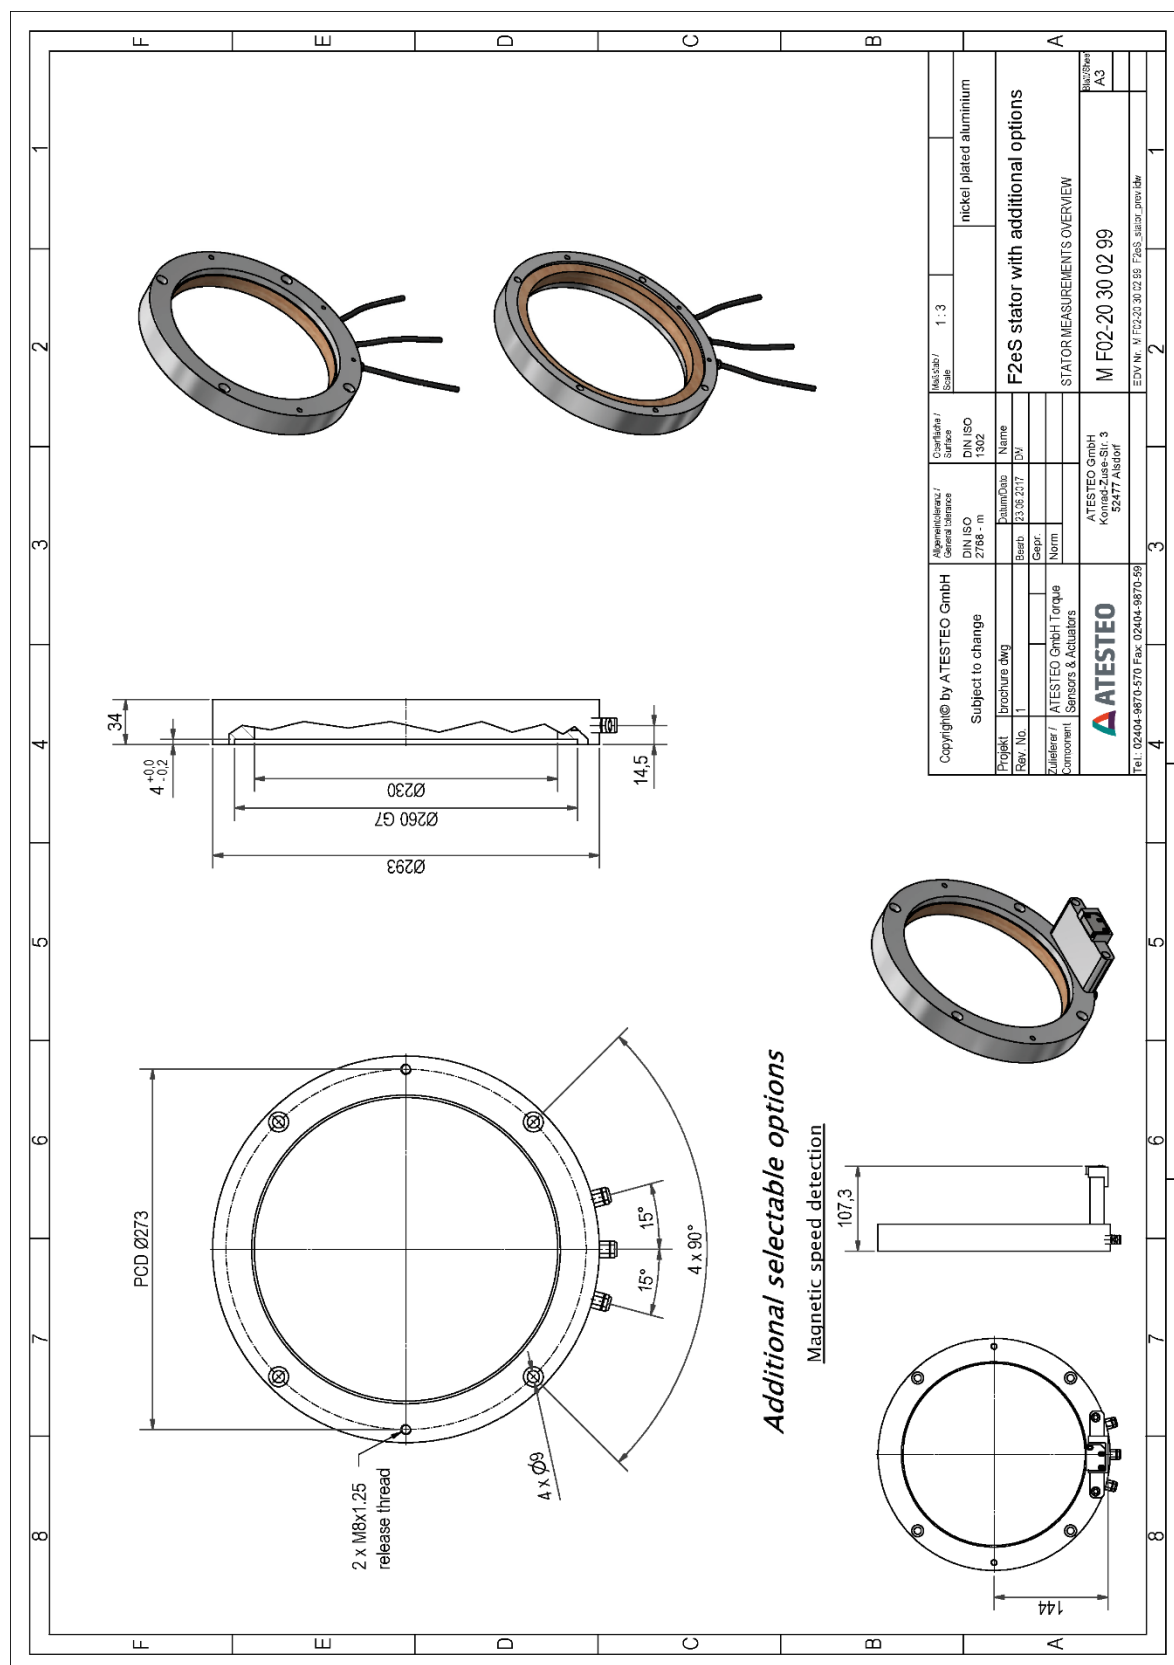

©2020, ATESTEO GmbH & Co. KG, This product data sheet was created on 12.16.2020

The information contained in the product data sheet corresponds to the status quo at the time the document was created. ATESTEO continually further develops its products and reserves the right to make changes to the technical data. ATESTEO does not accept any liability for consequential losses arising from the use of this product data sheet or the information contained therein.

Drawing

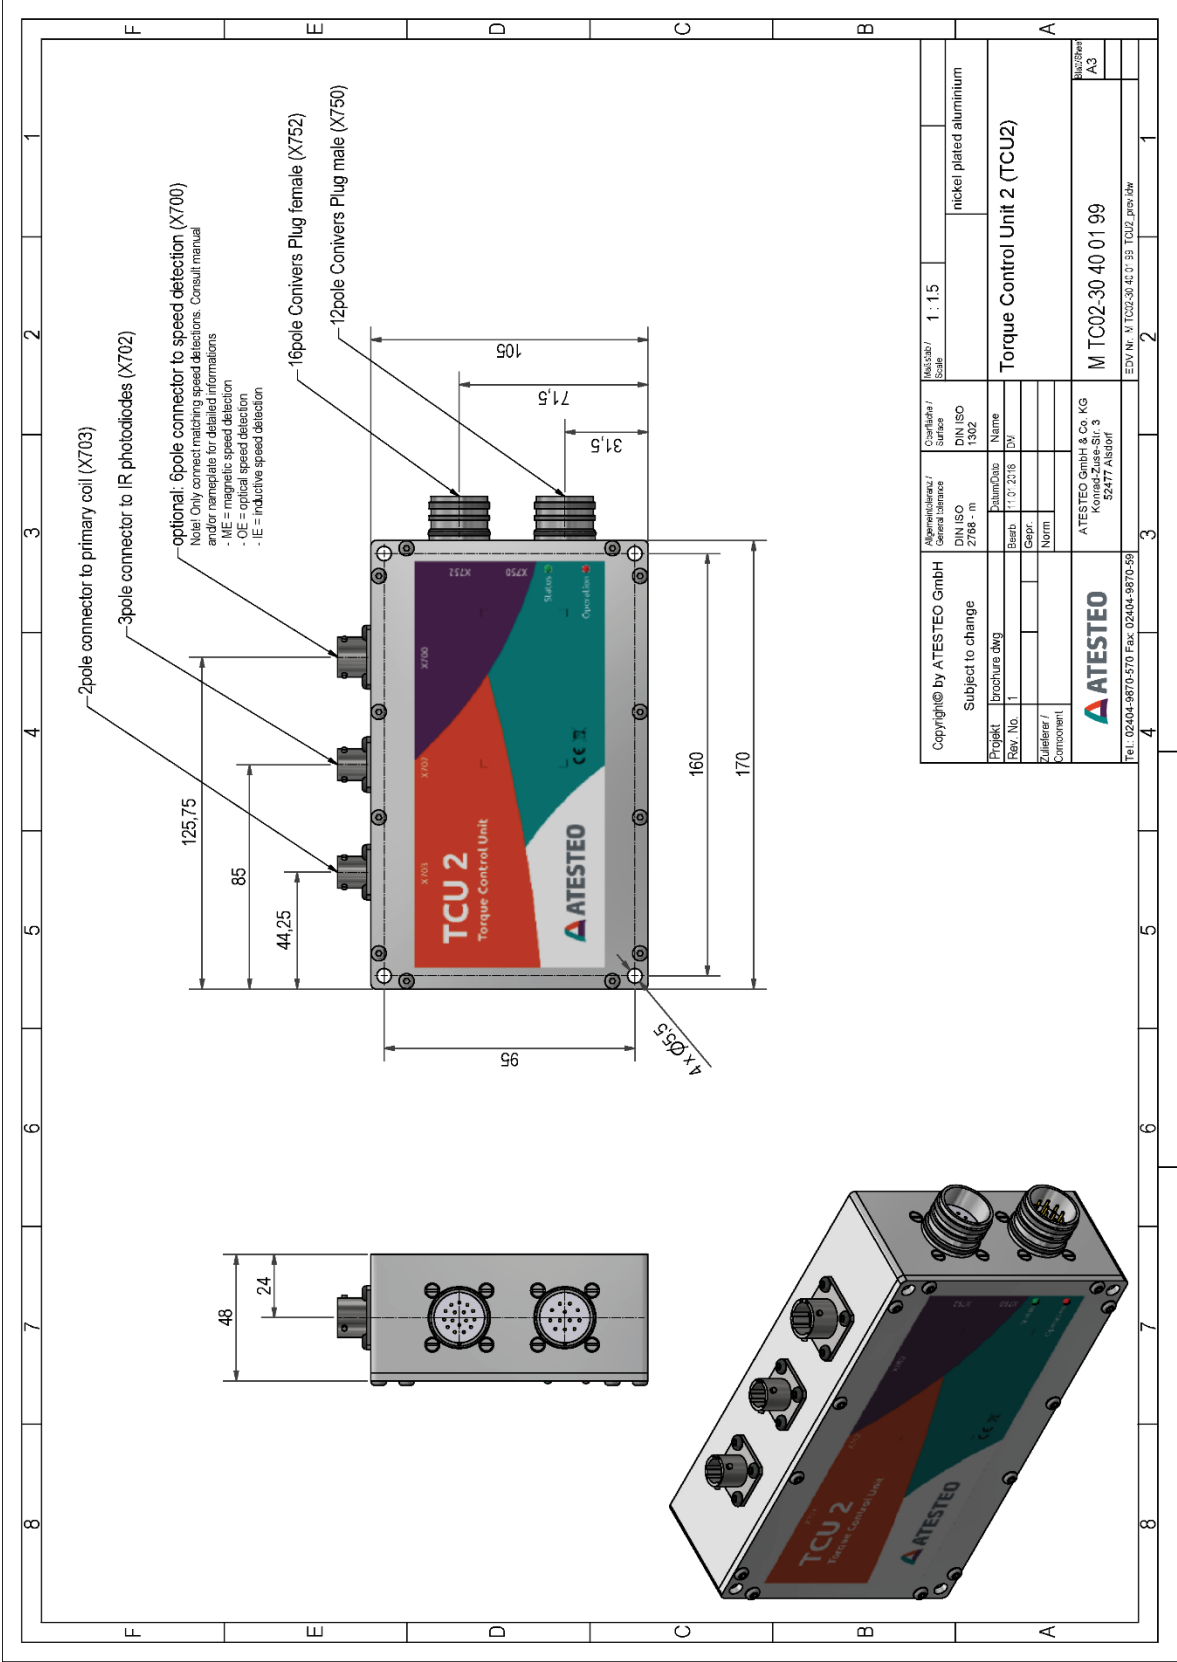

Would you like to learn more about our products, solutions, and services in the area of measuring systems, vehicle equipment, and actuators? Just call us at +49 (0) 2404 9870 570 or send email to equipment@atesteo.com. Your personal ATESTEO contact would be pleased to assist you.



ATESTEO GmbH & Co. KG
Konrad-Zuse-Straße 3
52477 Alsdorf
Germany

Telefon +49 (0) 2404 9870 - 0
Fax +49 (0) 2404 9870-109